

SOP01587

De-winterizing

Department: 32
 People Required: 1
 Time to Complete: 30mins
 Date Created: Dec. 13/18
 Date Revised: Feb. 24/23 Rev #: 2
 Created by Initial: BH Verified: WN/DH



Before you begin, make sure you've placed the inlet filter back in to the water heater and close the pressure relief valve if it was left open.
 Also ensure that the water heater is still in the bypass mode (Valves **A, B, D and E CLOSED**, Valve **C OPEN**).

1



In your exterior utility center, make sure your valves are set as follows:

Winterize valve: **"Normal Flow"**

Water Fill Selector Valve: **"Normal & City Water"**

2



Connect your motorhome to a city water connection

3



Inside the coach, turn on each faucet one at a time to allow water to flush from both hot and cold lines. Turn faucet off once water coming through is clear. Don't forget the toilet and exterior shower.

Also open valve **D** on the water heater for several seconds and then close it.


4



Once the antifreeze has been flushed out of the water lines, set your Water Fill Selector Valve to "Water Tank Fill Only", and fill the fresh water tank.


Be sure to close the fresh water tank drain if you left it open during winter!

5

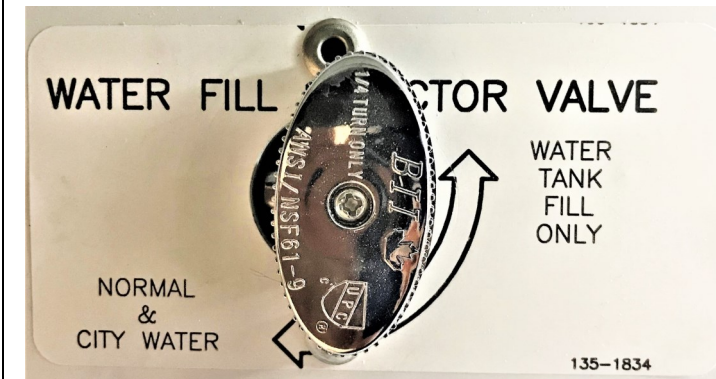


Once the fresh water tank is full, disconnect the water hose, set your Water Fill Selector Valve back to "Normal & City Water", and turn on the water pump.

6

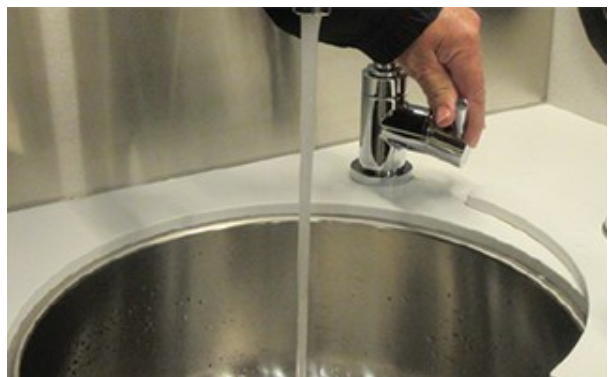

Repeat step 4, running the fresh water through all the faucets again for a few moments.

7

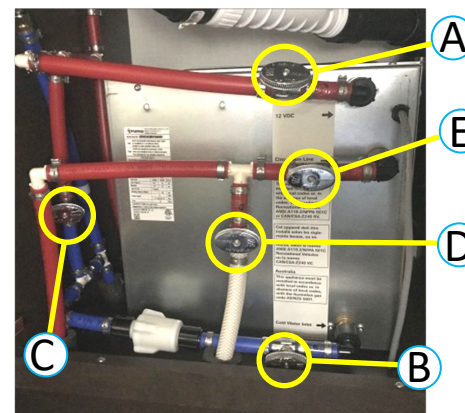

Take the water heater off bypass by setting your valves as follows:

Valves A, B and E OPEN
Valve C and D CLOSED

If your motorhome is equipped with a water filter, turn off the water pump, release the pressure at a faucet and you can now replace the filter that was removed during winterization.

8

9